

PERFORMANCE SPECIFICATIONS

Satellite Signals Tracked Simultaneously¹

Channels.....	1760
GPS.....	L1C/A, L2C, L2P, L5
BeiDou.....	B1I, B1C, B2a, B2b, B2I, B3I
GLONASS.....	L1CA, L2CA, L2P, L3
Galileo.....	E1, E5a, E5b, E5 AltBoc
QZSS.....	L1C/A, L1S, L2C, L5
NavIC.....	L5
SBAS*.....	L1, L2, L5
PPP.....	B2b-PPP

POSITIONING PERFORMANCE²

High-Precision Static

Horizontal.....	2.5 mm + 0.1 ppm RMS
Vertical.....	3.5 mm + 0.4 ppm RMS

Static and Fast Static

Horizontal.....	2.5 mm + 0.5 ppm RMS
Vertical.....	5 mm + 0.5 ppm RMS

Post Processing Kinematic (PPK / Stop & Go)

Horizontal.....	8mm+1ppm RMS
Vertical.....	15mm+1ppm RMS
Initialization time.....	Typically 10 min for base and 5 min for rover
Initialization reliability.....	Typically > 99.9%

Code Differential GNSS Positioning

Horizontal.....	±0.25m+1ppm RMS
Vertical.....	±0.5m+1ppm RMS
SBAS.....	0.5m(H), 0.85m(V)
PPP.....	10cm(H), 20cm(V)

Real Time Kinematic (RTK)

Single Baseline

Horizontal.....	8mm+1ppm RMS
Vertical.....	15mm+1ppm RMS

Network RTK(VRS,FKP,MAC)

Horizontal.....	8mm+0.5ppm RMS
Vertical.....	15mm+0.5ppm RMS
Initialization time.....	Typically 2-10s
Initialization reliability.....	Typically > 99.99%
Positioning rate.....	1 Hz, 5 Hz and 10 Hz

Hi-Fix³

Horizontal.....	RTK + 10 mm/minute RMS
Vertical.....	RTK + 20 mm/minute RMS

Tilt Survey Performance⁴

Additional horizontal pole-tilt uncertainty typically less than 8 mm +0.7 mm / °tilt (0° ~ 60°)

HARDWARE

Physical

Dimensions (W x H).....	158mm x 98mm (6.22inch x 3.86inch)
Weight.....	lighter than 1.3kg (2.65lb) within internal battery
Operation temperature.....	-40°C~-75°C (-40°F~-167°F)
Storage temperature.....	-50°C~+85°C (-58°F~+185°F)
Temperature control.....	Auto-adjust the working power to maintain the temperature
Humidity.....	100%, non-condensing

1.SBAS can be provided by firmware upgrade, PPP service is not available in all regions, check with your local sales representative for more information.

2.The measurement accuracy, precision, reliability and initialization time depend on various factors, including tilt angle, number of satellites, geometric distribution, observation time, atmospheric conditions and multi-path validation, etc. The data are derived under normal conditions.

3.Accuracies are dependent on GNSS satellite availability. Hi-Fix Positioning ends after 5 minutes without differential data.Hi-Fix is not available in all regions, check with your local sales representative for more information.

4.Irregular operations such as rapid rotation and high-intensity vibration may affect the inertial navigation accuracy.

5.The battery operating time is related to the operating environment, operating temperature and battery life.

Descriptions and Specifications are subject to change without notice

Water/dustproof..... IP67 dustproof, protected from temporary immersion to depth of 1m (3.28ft)

Shock and vibration.....	MIL-STD-810G, 514.6
Anti-salt spray.....	MIL-STD-810G, 509.4, 96h
Free fall.....	MIL-STD-810G, 516.6, designed to survive a 2m(6.56ft) natural fall onto concrete

Electrical

6V to 28V DC external power input(5-pin port), with over-discharge protection power consumption 4.4W Automatic switching between internal power and external power

Control Panel

Physical button.....	1
Display.....	1.3" OLED Touch Screen
LED Lights.....	Satellite, Signal, Power

Battery⁵

2 x 6900 mAh, 7.2 V lithium-ion rechargeable and removable battery.
RTK rover(UHF/Cellular) for 24 hours.
Power indicator embedded.
Quick charge within 3.5 hours.

I/O Interface

Bluetooth 4.0/2.1+ EDR, 2.4 GHz. USB 3.0 port , OTG function. 1 SMA antenna connector.
1 DC power input(5-pin),1 SIM card slot.
Near Field Communication(NFC)

Communication

Network Communication

Full band support for cellular mobile network(LTE, WCDMA, EDGE, GPRS, GSM).
2.4GHz Wi-Fi, supports the standard protocol 802.11 b/g/n. Network RTK(in CORS) range is 20-50km.

Internal UHF Transceiver Radio

Frequency.....	403~473MHz
Transmitting power.....	1~5W Hi-Target Advanced Radio
Supports protocols: HI-TARGET, TRIMTALK450S, TRIMMARK III, SATEL-3AS, TRANSEOT, etc.	
Working Range.....	Typically 3~5km, optimal 8~15km

External UHF Radio

Frequency.....	403~473MHz
Transmitting power.....	10W / 35W
Compatible with third party radio	
Working Range.....	Typically 8~10km, optimal 15~20km

SYSTEM CONFIGURATION

System

Data storage.....	Circulating 16GB Internal storage Record GNS and RINEX format simultaneously
-------------------	---

Data Formats

Output rate.....	1Hz-20Hz
Static data format.....	GNS, Rinex Dual Format Static Data
Network model.....	VRS, FKP, MAC; supports NTRIP protocol
Real Time Kinematic (RTK).....	RTCM3.X
Navigation outputs ASCII.....	NMEA-0183



AUTHORIZED DISTRIBUTION PARTNER


25A205

Hi-Target Surveying Instrument Co., Ltd

ADD: Building 13, Tian'An Technology Zone HQ Center, No. 555, North of Panyu RD, Panyu District, 511400 Guangzhou, China.
www.hi-target.com.cn +86-20-28688296 info@hi-target.com.cn

iRTK5 NEW

GNSS RTK SYSTEM

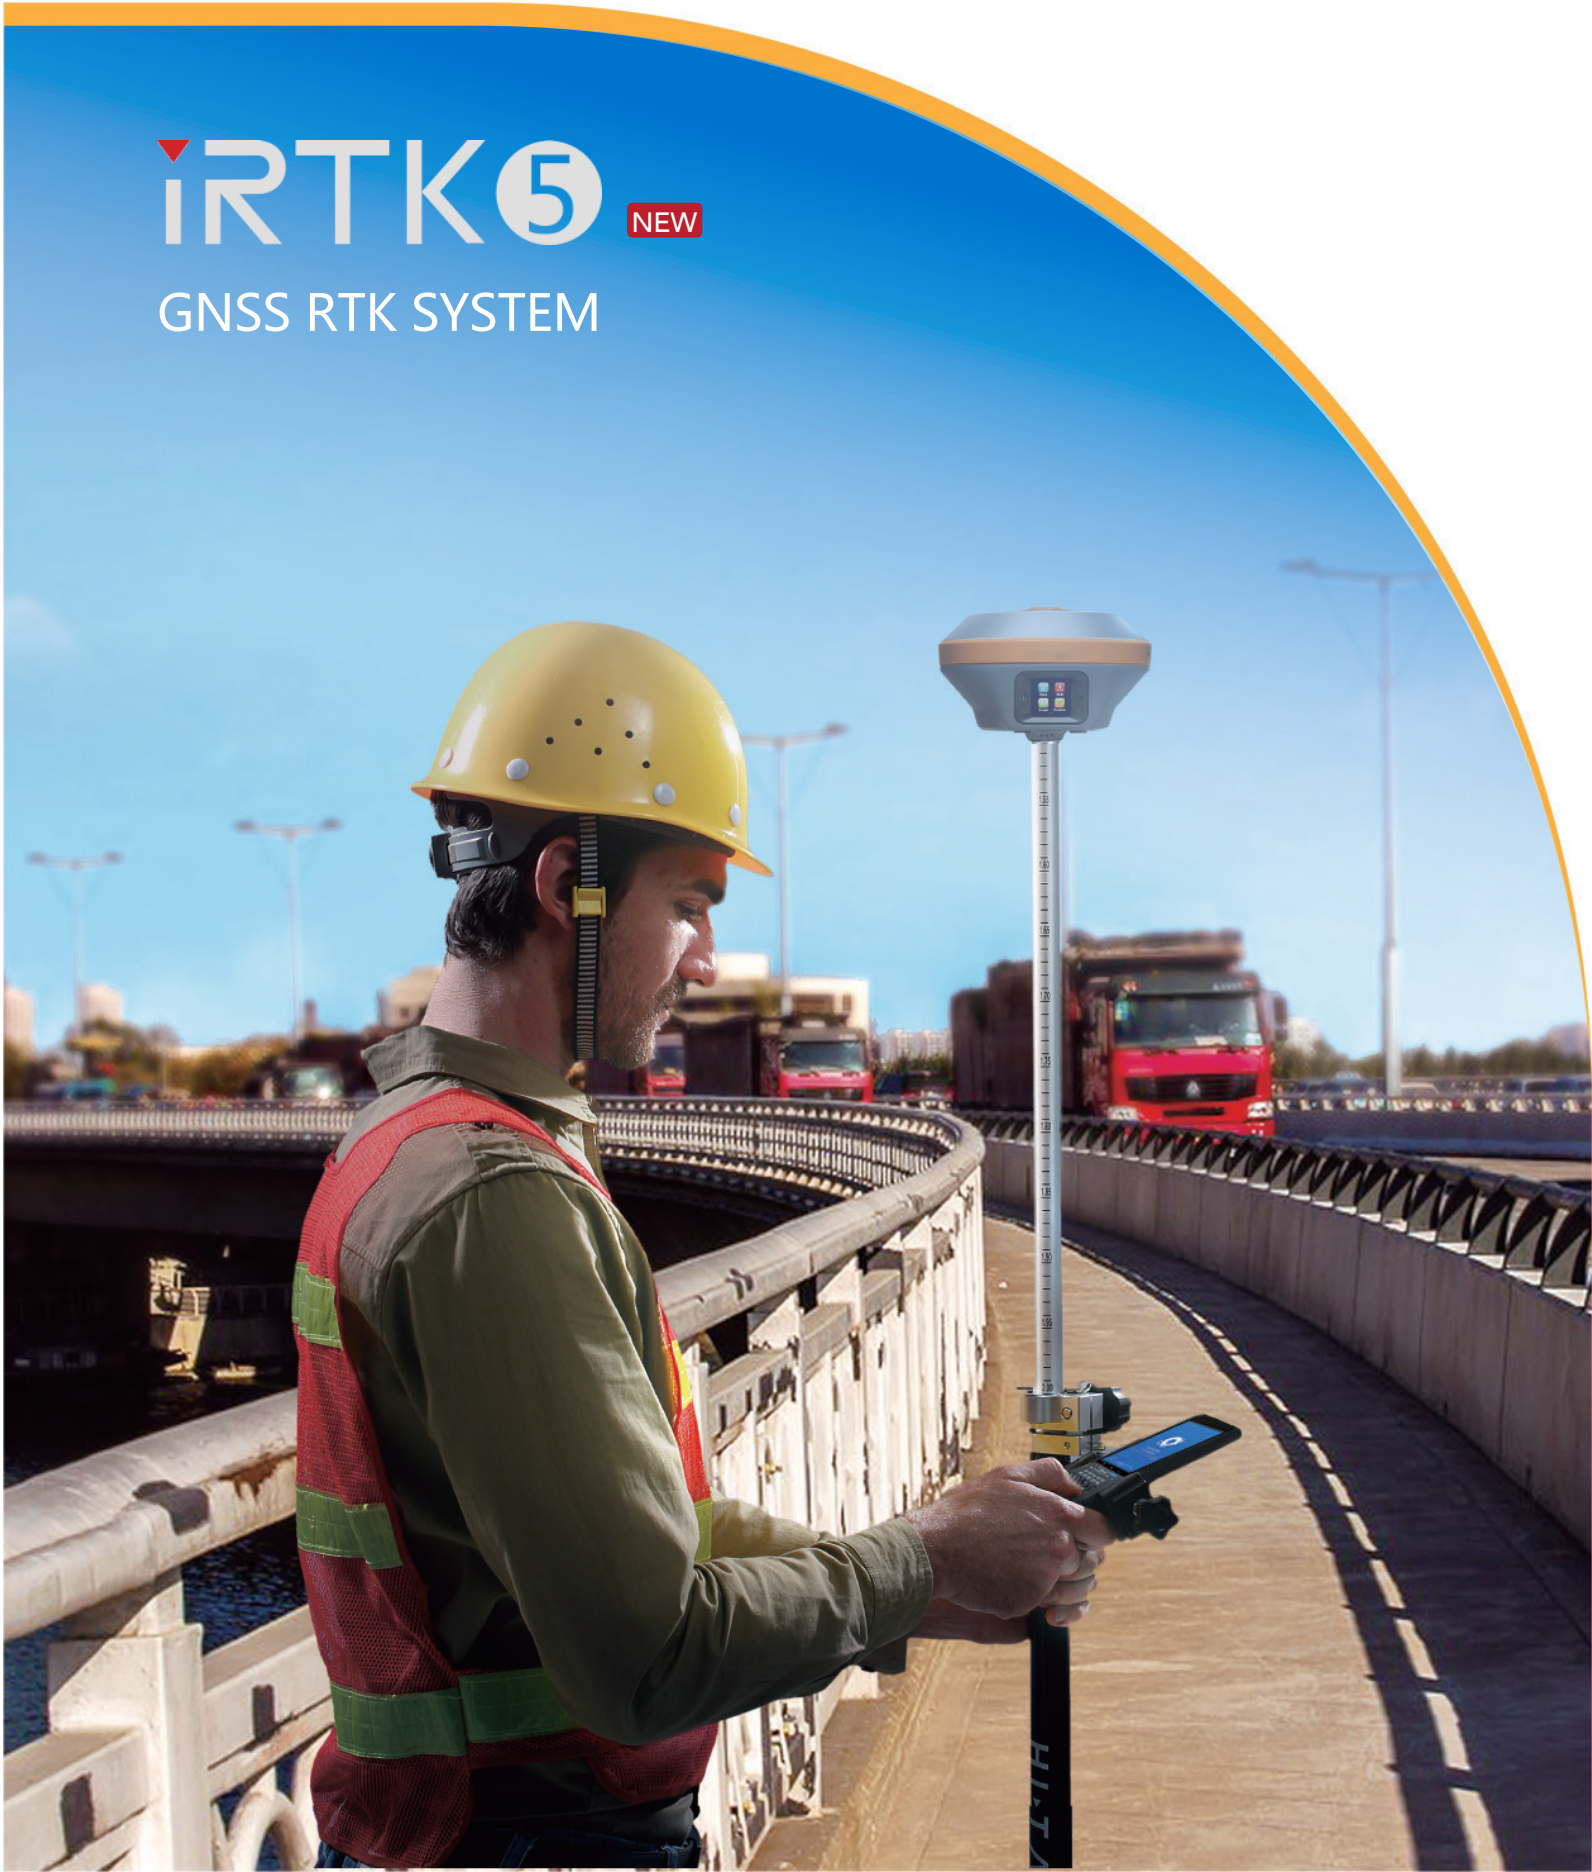

iRTK5 GNSS RTK SYSTEM

Benefiting from the next-generation GNSS engine, unlimited communication technology and innovative designs, iRTK5, the high quality scalable GNSS receiver, provides an industry-leading GNSS RTK surveying solution.



Next-Generation GNSS Engine

With the full-wave GNSS antenna and the next-generation GNSS engine, it supports full constellation by 1760 tracking channels, enhanced initialization speed and anti-noise performance.




Hi-Fix Technology

It can reduce downtime in the field with continuous RTK coverage during correction outages from an RTK base station or VRS network.



Unlimited Communication
360° Omni-directional Antenna and Multi-protocol Radio
The top-mounted radio antenna extends the radio working range and enables full omni-directional communication, making the distance of data transmitting and receiving extend to 20% longer. Multi-protocol radio, support Hi-Target, TRIMTALK450S, TRIMMARK III, TRANSEOT, SATEL-3AS, etc.

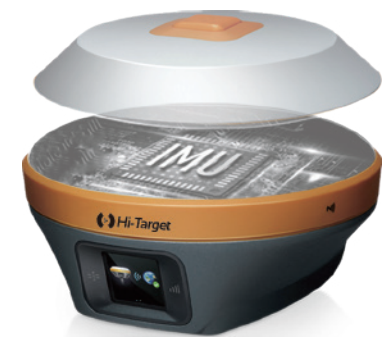

Revolutionary Tilt Survey with Built-in IMU

Customer benefit from calibration free for tilt survey without centering. Once you reach the surveying points, immediately start the operation. Compared with bubble leveling, boost working efficiency by 20%.



Error less than 2 cm within 60° inclination



Resistance to the interference of magnetic disturbances, ensure high accuracy.

Innovative Design



Reddot design award



Waterproof Touchscreen



Power Indicator



3rd Party Software



Web UI



Hi-Survey Software



Brand new UI, easier to understand and use



Professional programs in road application such as side slop settingout, DTM stakingout etc.



Basemap from online maps, DXF and SHP data

iHand55

- Android 11
- Type C USB port
- 3GB RAM+32GB ROM
- WiFi & Cellular simultaneous working
- IP 68



Hardware Configuration	Communication Interface	Physical Features
OS: Android 11 Processor: CPU: 8 core; 2.0 GHZ Storage: 3GB RAM+32GB ROM T-Flash memory card, up to 128GB Display: 720*1440, 5.5", 500 nit, bright Outdoor Color capacitive multi-touch screen Input Configuration: Qwerty full keyboard, number / letter separate, professional custom smart input method	Network modem: FDD-LTE B1/B3/B5/B7/B8/B20/B28/B2/B4/B12/B17 TDD-LTE B38/B39/B40/B41/B34 TDSCDMA B34/B39 WCDMA B1/B2/B5/B8/B4 GSM B2/B3/B5/B8 CDMA1x/CDMA2000 BC0 Cellular mobile:4G, Dual SIM WiFi:IEEE 802.11 a/b/g/n, Wapi, AP Bluetooth: Built-in Bluetooth (5.1+BLE) NFC USB:USB, TypeC interface, OTG	Weight: 406g(within battery) Size: 221 mm*78 mm*16.5 mm Operating temperature: -30°C ~ +60°C Storage temperature: -40°C ~ +80°C Free fall:1.2 m Shock and vibration: MIL-STD-810H