


# HT-32 Auto Level



## HT-32

#### **OVERVIEW**

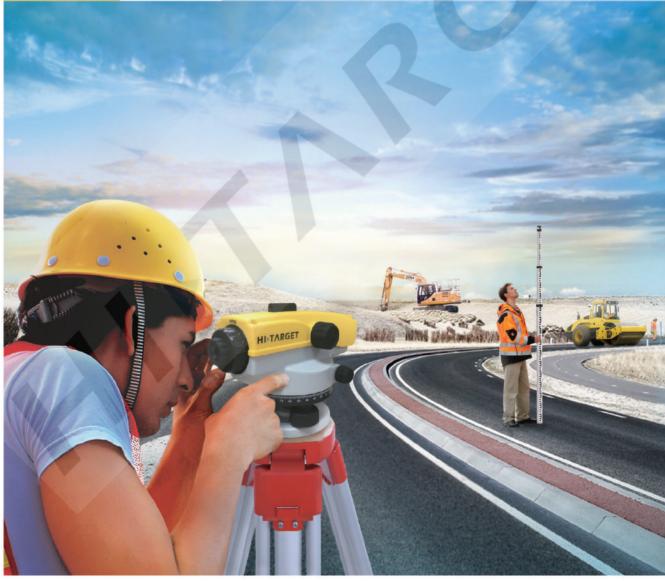

Featuring a lightweight and easy-to-grasp compact design, the HT-32 is an air damping compensator auto level that provides durability and flexibility for your surveying needs. Even when fine vibrations are present, rest assured that this equipment provides accurate and precise results. The HT-32 has an eco-friendly frame that is reinforced with IP66 protection to endure harsh weather conditions.

#### **KEY FEATURES**





Rugged, durable and accurate



32x Magnification



X-style air dumping compensator



P66



### **SPECIFICATIONS**

Standard deviation for 1 km double levelling		1.6mm
Telescope	Magnification	32X
	Filed of View	1°20'
	Objective Aperture	38mm
	Minimum Focusing Distance	1m
	Stadia	100
Compensator	Туре	X-style Air Dumping
	Compensating Range	±15′
	Setting Accuracy	±0.5"
Environmental conditions	Operating Temperature	-20°C ~+50°C
	Storage Temperature	-40°C ~+70°C
	Protection Level	IP66
	Net Weight	1.4KG

Descriptions and specifications are subject to change without notice.





Website Facebook

AUTHORIZED DISTRIBUTION PARTNER

#### **Hi-Target Surveying Instrument Co., Ltd.**

Addess: Building 13, Tian'An Technology Zone, No. 555, Panyu North Rd., Panyu District, Guangzhou, China (511400) TEL: +86-20-2288 3944 E-mail: info@hi-target.com.cn www.hi-target.com.cn